

Development of State Duration and Expectation Model for Evaluating Remaining Life of Manufacturing Systems

Nwadinobi, Chibundo Princewill

Department of Mechanical Engineering, Abia State Polytechnic, Aba, Abia State

Nwankwojike, Bethrand Nduka Abam, Fidelis Ibiang

Department of Mechanical Engineering, Micheal Okpara University of Agriculture, Umudike, Abia State, Nigeria

Abstract

The key goal of predicting the state expectation of an engineering system is to predict the remaining life of the system so as to aid in maintenance decision-making activities. In this paper, a maintenance model for predicting the state expectation of industrial machines has been developed. It incorporates various stages of deterioration and maintenance states. Given that a current state has been attained, from inspection and diagnosis, this model is capable of computing the predicted average time before a system failure occurs. This study focuses on using real data of an industrial Bottle filler machine to test the effectiveness of the State Expectation model and its effect on the reliability and maintainability of the machine. The model is tested for various scenarios by changing one of the main parameters during each calculation while others are kept constant. For the state duration sensitivity analysis, as the failure rate continuously increases from 0.0178 to 0.7060, the expected mean sojourning time for each degradation state decreased from 220.97hrs to 1.59hrs. Subsequently at uniform incrementally varied repair/maintenance rate (0.0861 to 0.7663), the state expectation of the equipment increases from 168.11hrs to 1189.98hrs. This allowed us to determine the most suitable decision to improve the reliability of the Bottle filler machine. The prediction result identifies the effectiveness of the proposed method in predicting RUL of manufacturing systems.

Keywords: Remaining Useful Life; State Expectation Model; Maintenance; Decision making; Prediction.

1.0 Introduction

In traditional maintenance technique, equipment is either repaired after failure (reactive maintenance) or scheduled for time-based preventive maintenance (planned maintenance). In recent years, a more cost-effective strategy called condition-based-maintenance (CBM) (Jardine et al, 2006 and Ye et al, 2012) has been implemented. Condition-Based Maintenance is a method that recommends maintenance decisions based on the actual health status of a machine or its components (Suprasad, 2006 and Byron, 2008). The application of CBM technique brings down maintenance costs and increases efficiency by taking maintenance interventions only when the system exhibits abnormality in its functions (Medjaher, 2012). To be able to schedule maintenance based on the condition, Condition Monitoring (CM) to collect condition data; and Remaining Useful Life (RUL) prediction based on condition data are required (Dorst, 2014). Estimation of RUL (or time to failure) of a component or system which can be obtained based on their use and performance can be performed and is known as prognostics/forecasting (Medjaher, 2012 and Coble, 2010).

As deterioration in equipment sets in, certain performance parameters in the system tend to change, thereby characterizing degradation. Degradation measures consist of sensed measurements, such as vibration analysis, oil analysis, infrared thermography, ultrasonic test and others, or inferred measurements, such as model based predictions. Xiongzi et al (2011) defined RUL as the duration from current time to end of useful life for an equipment/component. It is the time left for a component to perform its functional capabilities before failure. There are several prediction methods used for determining the RUL of systems. RUL prediction can be achieved through degradation measures collected. The degradation signal should be strongly linked to the failure of the system and contains important information about its health status. In general, Remaining Useful Life (RUL) predictions are typically undertaken using model-based, analytical-based, knowledge-based, and hybrid-based approaches and tools (Schwabacher, 2005 and Okoh et al, 2014). In Model-Based, Remaining Useful Life prediction done using statistical and probabilistic approaches (Pecht, 2008). These models are derived from operational, failure and historical data and utilised in maintenance decision making. Markov Models is used in this case where the time frequency features allow more precise results (Gasvik et al, 2014). Also, no foreknowledge of the physics of the formation of a component is required (Xiongzi et al, 2011). The Analytical-based RUL prediction approach represents the physical failure technique attributing to Physics-of-Failure (PoF). It requires the combination of experiment, observation, geometry, and physical changes condition parameters. The limitation of this method is that there is a need for full study of the system under consideration and intensive model development computation, making the approach difficult or even impossible to implement in many real life systems (Pecht, 2008). Knowledge-Based model is a combination of Computational Intelligence and

experience. It relates to the collection of stored information from experts and interpretation (Chen et al, 2012). A hybrid model is a collection of methodology and technique using several techniques for RUL estimation to improve accuracy.

Consequent to the limitations that most of the condition monitoring processes depend only on physical changes data form that is not always available in real industrial cases due to operational logistics and high costs of monitoring sensors, data acquisition, analysis, expert training, and so on. Also, these methods often have poor prediction accuracy due to undesired values in the data set. Notwithstanding, there is the need to curtail equipment failure and a timely awareness of failure mechanism for maintenance decisions regards to real life engineering practice. To this end, this work is implementing a model-based method for predicting system degradation states duration and RUL of equipment with a minimal computational requirement. This is achievable through extracting information from the operational and breakdown data of systems to produce reliable information about the state of the particular system and its remaining useful life. These variables include the total operational period, the no of breakdowns, the total downtime, mean time between failures of the component, and mean time to repair of the component that is directly obtained in the field and have a direct influence on the equipment under consideration. The benefits to be gained by using this effective process of predicting the future state of a system is that it enhances the effective management of equipment and infrastructure.

2.0 Methodology

To predict the remaining useful life, it is important to sufficiently understand the functioning of the engineering system under consideration, estimate the state-of-health, and identify the possible future period at which system continuous operation becomes inefficient (Engel, 2000). The time-instant as mentioned earlier is known as the end-of-life (EOL), and it is possible to identify it by evaluating the expectations of the states. The computation of the RUL may be computationally intensive since it runs until EOL is reached. The proposed method applies to all cases where the state-of-health of the system is steadily decreasing as a result of deterioration.

The first step of estimating the present state serves as the prelude to predicting the future state of a system and RUL computation. The health status of the system uniquely informs the level of damage in the system. Furthermore after estimated the state at time t_i , the next step is to predict the future states of the equipment. From the proposed formulation, equation (11) is used for this purpose. This equation can be discretized and used to predict the states at any future time instant $t > t_i$. Lastly, the machine remaining useful life estimation is done by calculating the period of the immediate time to the death status time. Some machine parameters such as failure and repair rates are used in this evaluation. Machine operating regions are divided into four states. This model can predict the time trajectory of the machine states using some collected reliability data.

2.1 Model Description

The failure-maintenance model (Fig.1) is a state space model. Three types of maintenance action will be adopted on the basis of the requirement of the system. The three types of maintenance actions are Minor maintenance (mM), Intermediate maintenance (IM) and Major maintenance (MM). In state D_1 , the system is new, therefore require minimal/minor maintenance to remain in state D_1 . Also, in state D_2 for an operational system, there is deterioration compared to the system in state D_1 . Due to this reason, it is presumed that the system would go back to stages D_1 or D_2 based on the type of maintenance action carried out. Again, for a system degrading from state D_2 to D_3 , there is the probability that the system requires any of the maintenance actions or no maintenance to go back to the desired state. This series of action applies to state D_4 before failure due to degradation F_1 , though random failure F_0 can occur within the life of the system.

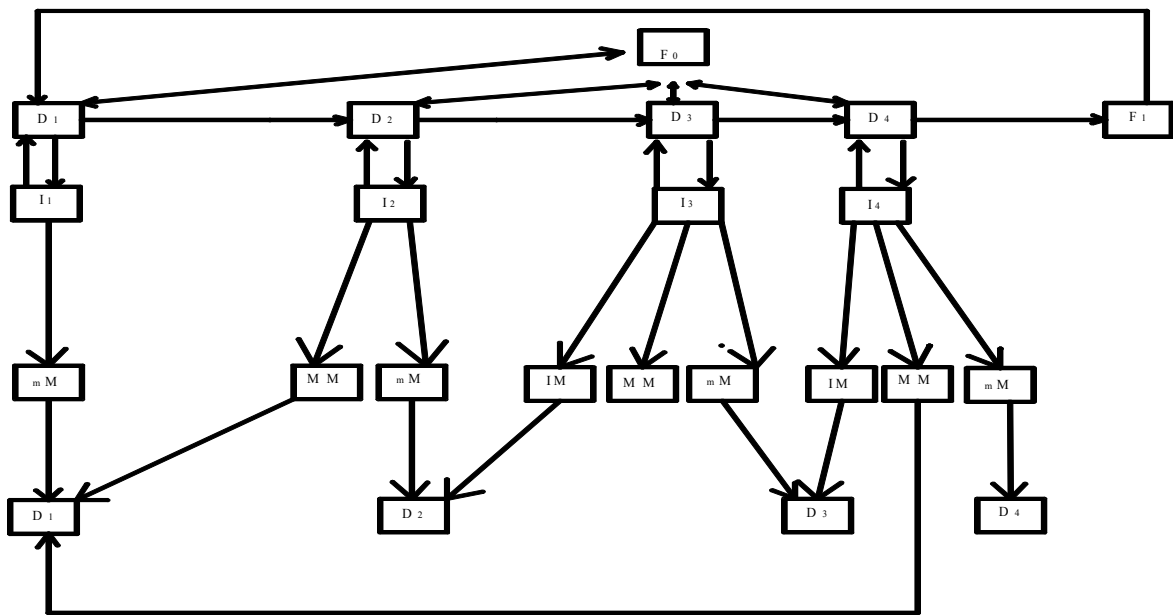


Figure 1: System/Equipment maintenance model

2.2 State duration model development

Considering a system that is repairable and maintainable having N components, each subject to deterioration. Each component i is assumed to have rate of failure occurrence, $\lambda_i(t)$, where t is the actual time, ($t > 0$). The rate of failure occurrence given as:

$$\lambda_i(t) = \left(\frac{P_i}{F_i}\right)^{-1} = \frac{1}{MTBF_i} \quad (1)$$

where P_i , F_i and $MTBF_i$ indicates the total operational period (duration), the no of breakdowns (frequency) and mean time between failures of component i respectively.

At a degradation stage or failed state, repairs are undertaken at a repair rate. The repair rate is given as:

$$\mu_i(t) = \left(\frac{B_i}{F_i}\right)^{-1} = \frac{1}{MTTR_i} \quad (2)$$

where B_i , F_i and $MTTR_i$ indicates the total downtime (duration), the no of breakdowns (frequency) and mean time to repair of component i respectively.

Consider a repairable system with failure rates λ_i and repair rates μ_i and let T_i denote starting time from state i , it takes for the process to enter state $i + 1$, $i \geq 0$. We can compute $E(T_i)$, $i \geq 0$, by starting with $i = 0$. The transition rate from state i to state $i + 1$ (failure rates) is denoted λ_i . Therefore, the expectation in state i is $E(T_i)$ and it can be represented as

$$E(T_i) = \frac{1}{\lambda_i} \quad (3)$$

Also, the transition rate of the i th state is given as the reciprocal of the expectation of state i .

That is

$$\lambda_i = \frac{1}{E(T_i)} \quad (4)$$

Since T_0 is exponential with rate λ_0 , we have: $E(T_0) = \frac{1}{\lambda_0}$

For $i > 0$, a condition whether the first transition can probably take the progression into state $i - 1$ or $i + 1$. That is, let

$$I_i = \begin{cases} 1, & \text{if the first transition from } i \text{ is to } i + 1 \\ 0, & \text{if the first transition from } i \text{ is to } i - 1 \end{cases}$$

and note that

$$E(T_i | I_i = 1) = \frac{1}{\lambda_i + \mu_i}, \quad (5)$$

$$E(T_i | I_i = 0) = \frac{1}{\lambda_i + \mu_i} + (E[T_{i-1}] + E[T_i]) \quad (6)$$

This follows since, independent of whether the first transition is into state $i - 1$ or $i + 1$, the time until it occurs is exponential with rate $\lambda_i + \mu_i$; if this first transition is a $i + 1$ state, then no additional time is needed; whereas if it is $i - 1$ state, then the added time required to reach $i + 1$ is equivalent to the time needed to return to state i (this has mean/expectation $E[T_{i-1}]$) plus the additional time it then takes to reach $i + 1$ (this has mean/expectation $E(T_i)$).

Hence, since the probability that the first transition of $i + 1$ is $\frac{\lambda_i}{\lambda_i + \mu_i}$, we see that

$$E(T_i) = \frac{1}{\lambda_i + \mu_i} + \frac{\mu_i}{\lambda_i + \mu_i} (E[T_{i-1}] + E[T_i]), \quad (7)$$

$$E(T_i) = \frac{1}{\lambda_i} + \frac{\mu_i}{\lambda_i} (E[T_{i-1}]), \quad i \geq 1 \quad (8)$$

$$E(T_i) = \frac{1}{\lambda_i} (1 + \mu E[T_{i-1}]), \quad i \geq 1 \quad (9)$$

$$E(T_i) = \frac{1}{\lambda_i} \left(1 + \left[\frac{\mu_i}{\lambda_i} \right] + \dots + \left[\frac{\mu_i}{\lambda_i} \right]^i \right), \quad i \geq 1 \quad (10)$$

$$E(T_i) = \frac{1 - \left[\frac{\mu_i}{\lambda_i} \right]^{i+1}}{\lambda_i + \mu_i}, \quad i \geq 1 \quad (11)$$

Starting with $E(T_0) = \frac{1}{\lambda_0}$, as the last state (as the end-of-life (EOL)), we can successively compute efficiently $E(T_1)$, $E(T_2)$, and so on. This procedure is used to determine the expected time to go from state i to state j where $i < j$, as this will give quantities that will equal $E(T_i) + E(T_{i+1}) + \dots + E(T_{j-1})$. Applying this to Figure 1, we have:

$$E(T_1) = \frac{1}{\lambda_1} \left(1 + \left[\frac{\mu_4}{\lambda_4} \right] + \left[\frac{\mu_4}{\lambda_4} \right]^2 + \left[\frac{\mu_4}{\lambda_4} \right]^3 + \left[\frac{\mu_4}{\lambda_4} \right]^4 \right) \quad (12)$$

$$E(T_2) = \frac{1}{\lambda_2} \left(1 + \left[\frac{\mu_3}{\lambda_3} \right] + \left[\frac{\mu_3}{\lambda_3} \right]^2 + \left[\frac{\mu_3}{\lambda_3} \right]^3 \right) \quad (13)$$

$$E(T_3) = \frac{1}{\lambda_3} \left(1 + \left[\frac{\mu_2}{\lambda_2} \right] + \left[\frac{\mu_2}{\lambda_2} \right]^2 \right) \quad (14)$$

$$E(T_4) = \frac{1}{\lambda_4} \left(1 + \left[\frac{\mu_1}{\lambda_1} \right] \right) \quad (15)$$

3.0 Results and Discussion

The developed model was implemented and the obtained results analyzed using reliability data for a Bottle filler machine from line 1 of 7up Bottling Company, Aba plant. The rates utilized are as obtained from the machine's operational data. Three scenarios are involved in the implementation (to test the validity/effectiveness of the model) of the mathematical model to obtain effective results for the machine under consideration. The first scenario involves calculating the values of Expected time of Normal State ($E(T_{\text{normal}})$) by keeping the constant values repair rate or failure rate and varying the value of repair rate or failure rate as the case may be. Table 1 presents the calculated values, and the graph is plotted in figure 2. This procedure is repeated for Expected time of PM State and Expected time of CM State

Table 1: Sensitivity analysis of repair rate and failure rate on Expected time of Normal State

CASE 1			CASE 2		
μ_{normal}	λ_{normal}	$E(T_{\text{normal}})$	μ_{normal}	λ_{normal}	$E(T_{\text{normal}})$
0.0947	0.0178	10405.22	0.0947	0.0178	
0.1305	0.0178	25626.41	0.0947	0.0536	212.75
0.1663	0.0178	51298.6	0.0947	0.0894	48.88
0.2021	0.0178	90164.13	0.0947	0.1252	22.05
0.2379	0.0178	144965.3	0.0947	0.161	13.28
0.2737	0.0178	218444.5	0.0947	0.1968	9.27
0.3095	0.0178	313344	0.0947	0.2326	7.05
0.3453	0.0178	432406.2	0.0947	0.2684	5.67
0.3811	0.0178	578373.4	0.0947	0.3042	4.73
0.4169	0.0178	753987.9	0.0947	0.34	4.05
0.4527	0.0178	961992.1	0.0947	0.3758	3.54
0.4885	0.0178	1205128	0.0947	0.4116	3.15
0.5243	0.0178	1486139	0.0947	0.4474	2.83
0.5601	0.0178	1807766	0.0947	0.4832	2.57
0.5959	0.0178	2172752	0.0947	0.519	2.35
0.6317	0.0178	2583840	0.0947	0.5548	2.17
0.6675	0.0178	3043771	0.0947	0.5906	2.02
0.7033	0.0178	3555288	0.0947	0.6264	1.88
0.7391	0.0178	4121134	0.0947	0.6622	1.76
0.7749	0.0178	4744050	0.0947	0.698	1.66

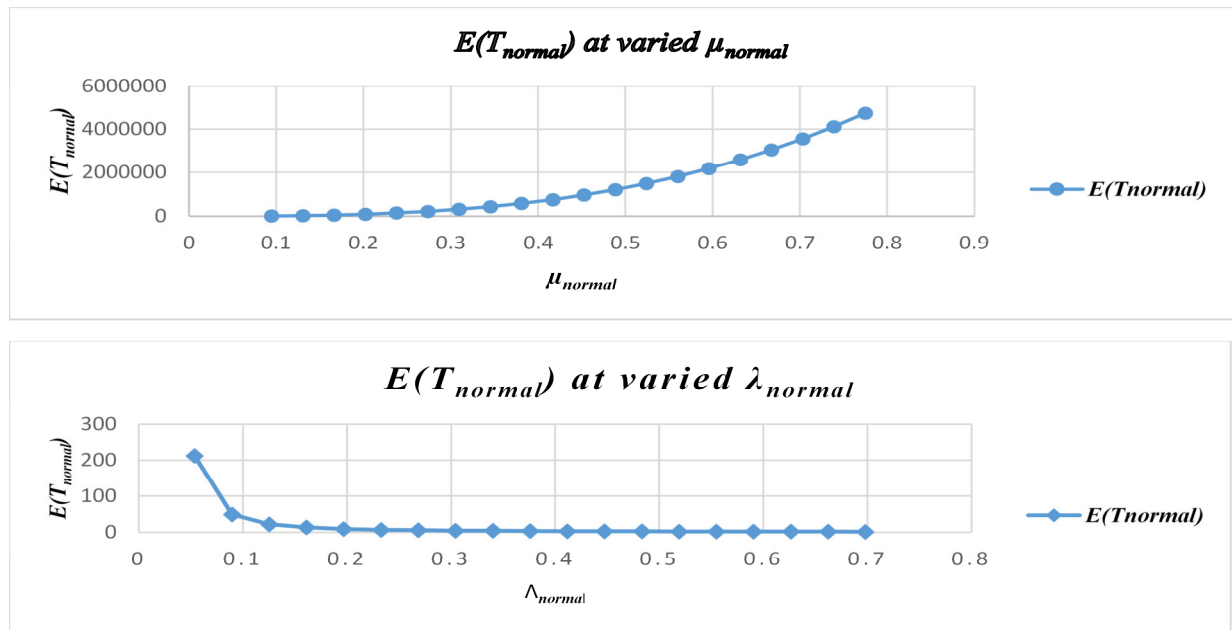


Figure 2: Sensitivity data plot for $E(T_{normal})$

Table 2: Sensitivity analysis of repair rate and failure rate on Expected time of PM State

CASE 1			CASE 2		
μ_3	λ_3	$E(T_3)$	μ_3	λ_3	$E(T_3)$
0.0395	0.0241	220.97	0.0395	0.0241	220.97
0.0753	0.0241	576.22	0.0395	0.0599	34.96
0.1111	0.0241	1114.59	0.0395	0.0957	16.54
0.1469	0.0241	1836.09	0.0395	0.1315	10.57
0.1827	0.0241	2740.71	0.0395	0.1673	7.72
0.2185	0.0241	3828.46	0.0395	0.2031	6.07
0.2543	0.0241	5099.33	0.0395	0.2389	4.99
0.2901	0.0241	6553.32	0.0395	0.2747	4.24
0.3259	0.0241	8190.44	0.0395	0.3105	3.68
0.3617	0.0241	10010.68	0.0395	0.3463	3.25
0.3975	0.0241	12014.04	0.0395	0.3821	2.92
0.4333	0.0241	14200.53	0.0395	0.4179	2.64
0.4691	0.0241	16570.14	0.0395	0.4537	2.41
0.5049	0.0241	19122.88	0.0395	0.4895	2.22
0.5407	0.0241	21858.74	0.0395	0.5253	2.06
0.5765	0.0241	24777.72	0.0395	0.5611	1.92
0.6123	0.0241	27879.83	0.0395	0.5969	1.79
0.6481	0.0241	31165.06	0.0395	0.6327	1.69
0.6839	0.0241	34633.42	0.0395	0.6685	1.59
0.7197	0.0241	38284.9	0.0395	0.7043	1.5

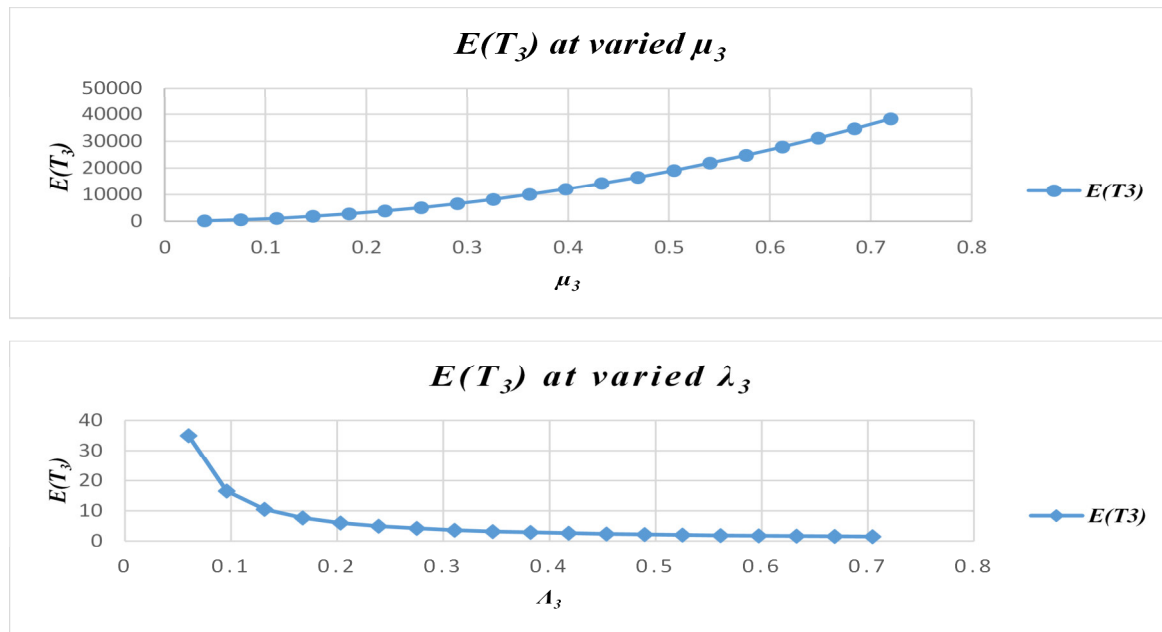


Figure 3: Sensitivity data plot for $E(T_3)$

Table 3: Sensitivity analysis of repair rate and failure rate on Expected time of Failure State

CASE 1			CASE 2		
μ_4	λ_4	$E(T_4)$	μ_4	λ_4	$E(T_4)$
0.0861	0.0258	168.11	0.0861	0.0258	168.11
0.1219	0.0258	221.89	0.0861	0.0616	38.92
0.1577	0.0258	275.67	0.0861	0.0974	19.34
0.1935	0.0258	329.46	0.0861	0.1332	12.36
0.2293	0.0258	383.24	0.0861	0.169	8.93
0.2651	0.0258	437.02	0.0861	0.2048	6.94
0.3009	0.0258	490.81	0.0861	0.2406	5.64
0.3367	0.0258	544.59	0.0861	0.2764	4.74
0.3725	0.0258	598.37	0.0861	0.3122	4.09
0.4083	0.0258	652.15	0.0861	0.348	3.58
0.4441	0.0258	705.94	0.0861	0.3838	3.19
0.4799	0.0258	759.72	0.0861	0.4196	2.87
0.5157	0.0258	813.5	0.0861	0.4554	2.61
0.5515	0.0258	867.29	0.0861	0.4912	2.39
0.5873	0.0258	921.07	0.0861	0.527	2.21
0.6231	0.0258	974.85	0.0861	0.5628	2.05
0.6589	0.0258	1028.63	0.0861	0.5986	1.91
0.6947	0.0258	1082.42	0.0861	0.6344	1.79
0.7305	0.0258	1136.2	0.0861	0.6702	1.68
0.7663	0.0258	1189.98	0.0861	0.706	1.59

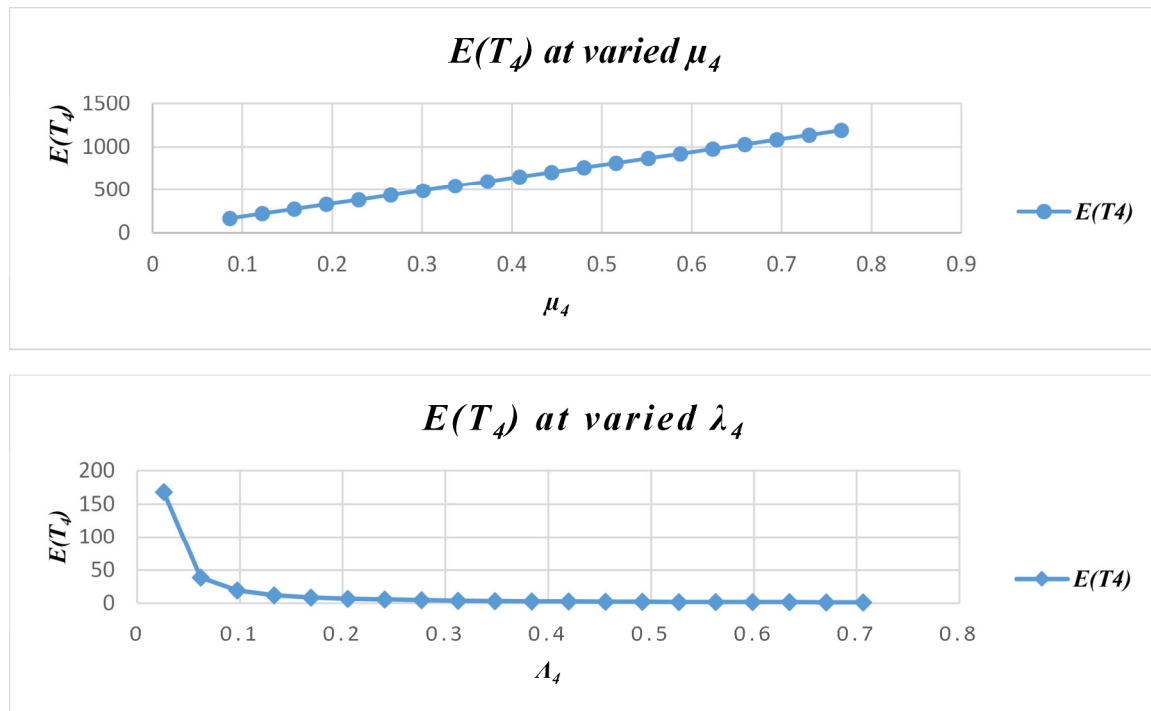


Figure 4: Sensitivity data plot for $E(T_4)$

The sensitivity analysis was done using data obtained from a bottle filler machine. The results obtained from the sensitivity analysis of the estimated filler machine lifespan at varying failure rates for the three significant deterioration states in the developed network model, where all other variable parameters such as maintenance/repair rate are held constant. The results obtained are displayed as shown in figures 1b, 2b and 3b. The resulting graphs show that as the failure rate continuously increases, the expected mean sojourning time for each degradation state decreases. Subsequently, at constant failure rate and varied repair/maintenance rate, the state expectation of the equipment was again observed and the results obtained were also graphically represented to show the behaviour of this variation as shown in figures 1a, 2a and 3a. This graph shows that the repair rate is directly proportional to the computed state expectation time of the equipment under consideration. This implies that as equipment maintenance is undertaken, the useful life of the machinery is prolonged. Conversely, if maintenance is not done when required, end of life become close.

4.0 Conclusions

A general methodology was developed for estimation of machine remaining useful life using reliability data. This mathematical formulation is capable of calculating the expected transition time from any deterioration state to the failure state (expected remaining life) of the equipment in consideration. The program was applied to a Bottle Filler machine in one of the bottling lines utilized for the study. The model is tested for various scenarios by changing one of the main parameters during each calculation while others are kept constant. For the state duration sensitivity analysis, as the failure rate continuously increases from 0.0178 to 0.7060, the expected mean sojourning time for each degradation state decreased from 220.97hrs to 1.59hrs. Subsequently at uniform incrementally varied repair/maintenance rate (0.0861 to 0.7663), the state expectation of the equipment increases from 168.11hrs to 1189.98hrs. This allowed us to determine the most suitable decision to improve the reliability of the Bottle filler machine. This model will be of benefit to industries because the ability to predict the future state of a system is a proactive practice.

References

- Byron A. Ellis (2008) Condition Based Maintenance; The Jethro Project, (TJP); www.jethroproject.com, TJP, November 10, 2008, pp. 1-5.
- Chen, C., Vachtsevanos, G. and Orchard, M. E. Machine remaining useful life prediction: An integrated adaptive neuro-fuzzy and highorder particle filtering approach. Mechanical Systems and Signal Processing 2012 4; 28(0):597-607.
- Coble, Jamie Baalis, (2010) "Merging Data Sources to Predict Remaining Useful Life – An Automated Method to Identify Prognostic Parameters." PhD diss., University of Tennessee, 2010. http://trace.tennessee.edu/utk_graddiss/683.
- Dorst, N.F.G., Adan, I.J.B.F., Peng, H., Melssen, J.A.M., and Lemmens, R.W.F.J.M. (2014) Component

- Condition Monitoring and Remaining Useful Life prediction; Manufacturing Networks Group, <http://www.tue.nl/mn>; February 14, 2014. Pg 1.
- Engel, S. J., Gilmartin, B. J., Bongort, K., and Hess, A. (2000) Prognostics, the real issues involved with predicting life remaining. In Aerospace conference proceedings, 2000 IEEE; Vol. 6; pp. 457–469.
- Gasvik, K. J., Robbersmyr, K. G., Vadseth, T. and Karimi, H. R. Deformation measurement of circular steel plates using projected fringes. *The International Journal of Advanced Manufacturing Technology* 2014; 70(1):321-326.
- Jardine, A., Lin, D., and Banjevic, D. (2006) A review on machinery diagnostics and prognostics implementing condition-based maintenance. *Mechanical Systems and Signal Processing*, 20(7), pp 1483-1510.
- Medjaher, K., Tobon-Mejia, D. A. and Zerhouni, N. Remaining Useful Life Estimation of Critical Components with Application to Bearings. *IEEE Journal of Transactions on Reliability* 2012;61(2):292-302.
- Okoh, C., Roy, R., Mehnen, J., and Redding, L. (2014) Overview of Remaining Useful Life Prediction Techniques in Through-Life Engineering Services; Product Services Systems and Value Creation. *Proceedings of the 6th CIRP Conference on Industrial Product-Service Systems; Procedia CIRP* 16, pp158 – 163.
- Pecht, M.G. (2008), *Prognostics and Health Management of Electronics*, John Wiley & Sons, Inc., New Jersey.
- Schwabacher, M., (2005), *A survey of data-driven prognostics*. AIAA InfoTech Aerospace.
- Suprasad V. A. (2006) *Cost-Effective Condition-Based Maintenance Using Markov Decision Processes*; Relex Software Corporation; Leland McLaughlin, Relex Software Corporation; Hoang Pham, Ph.D., Rutgers University, pp 1-6.
- Xiongzi, C., Jinsong, Y., Diyin, T. and Yingxun, W. Remaining useful life prognostic estimation for aircraft subsystems or components: A review. *10th IEEE International Conference on Electronic Measurement & Instruments (ICEMI) 2011*; 2:94.
- Ye, Z.S., Shen, Y., and Xie, M. (2012) Degradation-based burn-in with preventive maintenance. *European Journal of Operational Research*, 221 (2), 360-367.