

Climate Change Impacts on Water Resources in Desert Area Considering Irregularity in Rainfall Intensity and Distribution: A Case Study in Wadi Mujib Basin, Jordan

Esra'a Hani Khasawneh

Department of Civil Engineering, The Hashemite University, P.O. Box:150459, Zarqa 13115, Jordan

Abstract

There is a growing awareness regarding climate change fluctuation as its one of the central issues that affects water resources directly. This research was conducted to evaluate the effect of climate change on surface water resources due to the change in rainfall intensity and distribution and to investigate the sensitivity of water resources to climate change.

WEAP has been utilized to simulate future available water resources and figure out the possible implications of changing climate on Wadi Mujib Basin which represent the desert feature in Jordan. Different future scenarios have been built up and analyzed to predict the change in runoff over the period between 2014 and 2050; thus precipitation and evapotranspiration data for the period between 1991 and 2013 have been alerted for the model input to develop four different climate change scenarios.

The simulation shows that annual average runoff in the selected study area would decrease compared with “no change” scenario. This reduction will influence the amount of water stored in Mujib dam directly which in turns will add additional pressure on the available water resources and thus intensify water scarcity in the country. Climate change could also have effects on monthly runoff distribution. The model predicts that runoff will decrease in a different manner over months. March to June months along with October could face the highest relative decrease in runoff compared to December, January and February months.

Keywords: climate change, hydrological model, WEAP model, Mujib Basin, Desert Area

1. Introduction

Jordan is located in an arid to semi-arid region with a land area of 90,000 km². Deficit in water resources is the most important issue from which Jordan has suffered since the 1960s; so it is characterized as a ‘water scarce’ country where water resources are limited.

Rainfall is the main water resource that the country depends on. Due to the diversity in climatologically conditions and variation of topographic features of Jordan, this source falls irregularly and varies widely in quantity, intensity and distribution with location from year to year. Precipitation depth ranged from 600 mm in the northwest highlands to less than 50 mm in the eastern desert which covered about 91% of the area (MWI, 2012).

Jordan is also considered as one of the lowest countries in the world on a per capita basis. The available water resources per capita are projected to fall from less than 145 m³ per capita per year at present to about 91 m³ per capita per year by 2025 (MWI, 2012). Climate change is expected to intensify this water status and add additional pressure on water availability in the future, it may affect the availability of water resources in the country negatively; this could enlarge the gap between supply and demand.

Water resources are threatened by severe climate change conditions. Over the last decades, the average temperature of the earth’s atmosphere has been rising due to the increased amount of green house gases concentration, mainly carbon dioxide. Scientists predict that this growing increase may also lead to global warming during this century. Moreover, global warming may have several implications on the available water resources; evaporation rates as long as precipitation pattern and intensity are the main hydrological variables that are alerted by increasing the average earth’s temperature (IPCC, 2001).

It is predicted that rainfall events tend to be more intense with increasing the concentration of greenhouse gases due to climate change; that’s because greenhouse gases lead to global warming and thus have an obvious effect on the hydrological cycle, which in turns enhance the change in climate components, and vice versa. Once the climate became warmer, more water tend to evaporate from the earth’s surface to the atmosphere and the moisture content held by warm air would increase, as a result, rainfall falls heavily and become more intense, based on the principle of water mass balance of the hydrological cycle.

In general, many models predict higher rainfall intensity and uneven temporal and spatial distribution, the intensity of rainfall events would increase by 10 to 30% due to doubling the amount of carbon dioxide in arid and semi arid areas. But the mass balance theory suggests that the total annual precipitation amount may decline (IPCC, 2001).

The most reliable models, Global Circulation Models (GCMs) based scenarios, are considered in developing future climate scenarios ideally; therefore, the climate simulation resulted from GCMs were used

frequently to derive hydrological models and evaluate the effect of climate change on the hydrological cycle. The main limitation of using GCMs climate simulations is resulting in different values of climate variables changes not only a single reliable estimate (IPCC, 2001).

Several GCMs scenarios have been used to model the future change in climate, thirteen GCM models have been analyzed to find out those that match with Jordan's climate conditions by comparing the model outputs with temperature records (Hammouri, 2009), and it was found that three models match the climate of Jordan, they are:

1. HADGEM1: HADley Center Global Climate Model, UK.
2. CSIRO-Mk3: Commonwealth Scientific and Industrial Research Organization (CSIRO), Australia.
3. ECHAM5OM: The 5th generation of the ECHAM general circulation model, Max Planck Institute for Meteorology, Germany.

Climate change projections for the 2020s climate parameters in comparison to the period 1961-1990 have been simulated using these three models for the Mediterranean countries, these models show minor changes in rainfall for the region, while mean temperatures are projected to increase significantly (0.8-2.1°C) (IPCC-DCC, 1999).

In general, each degree C of global temperature increase can be expected to increase the evapotranspiration by 7% and to change the precipitation by 5-10% across many regions including the Mediterranean countries (Allen et al., 1998), this increase would further impact the water balance and the river streamflow.

2. Materials and Methods

2.1 Selected Model

The selection of the hydrological model depends on many variables such as the problem objectives and the available data, therefore, the criteria for choosing the model must be determined before.

The hydrological model that is selected to be used in this work is the user-friendly Decision Support System tool WEAP, which is short for Water Evaluation And Planning system. The WEAP model was developed by the Stockholm Environment Institute in 1988. Since then, it has been successfully applied in many world regions, as a database or as a forecasting tool. It can be applied on single catchments up to complex river basin system. (Raskin et al., 1992).

WEAP is a scenario-driven decision support system for evaluating the relationships between hydrology, human water demands, and in stream flow requirements. Using WEAP, planner can analyze a wide range of water approaches through a scenario-based approach. These scenarios could reflect the change in climate variability and watershed condition (Yates et al., 2005).

2.2 Selected Study area

Mujib basin is considered as one of the major basins of Jordan, occupied an area of 6600 Km² which is about 7% of the total area of the Kingdom. It encompasses of two main Catchments, Mujib and Wala. The catchment area of wadi Mujib covers 4770 km², lying at elevations ranging from 1,030 m above sea level down to 160 m. It is located between (370,000 – 460,000) E longitudes and (390,000 – 490,000) N latitudes, see Figure 1.

The annual long term average precipitation varies from 350 mm/year along the mountain highlands in the northwestern part of the catchment to less than 100 mm/year in its western parts near the Dead Sea. The potential evaporation ranges from 3500 to 2400 mm/year.

Wadi Mujib drains a considerably stable flow of about 42MCM annually, records of flood flow can vary among dry and severe wet years. Mujib dam of a total storage capacity of 32 MCM was constructed and completed in 2003. The reservoir yield is 16.8 MCM to provide water to the southern Ghor irrigation project, the Arab Potash company, the Dead Sea chemical complex and to the developments on the east shore of the Dead Sea (Ijam and Al-Mahamid, 2012).

The northern part of the study area have a Mediterranean climate while eastern and southern part of Mujib catchment area is encountered with arid to semi arid climate. Rainfall falls irregularly and varies widely in quantity, intensity and distribution with location; precipitation depth ranged from 600 mm at the northern parts and decreases to less than 200 mm when moving southwards. The rainy season starts in October and last to April, during the rainy season, most of the rain occurs between December and March (Haddadin et al., 2010).

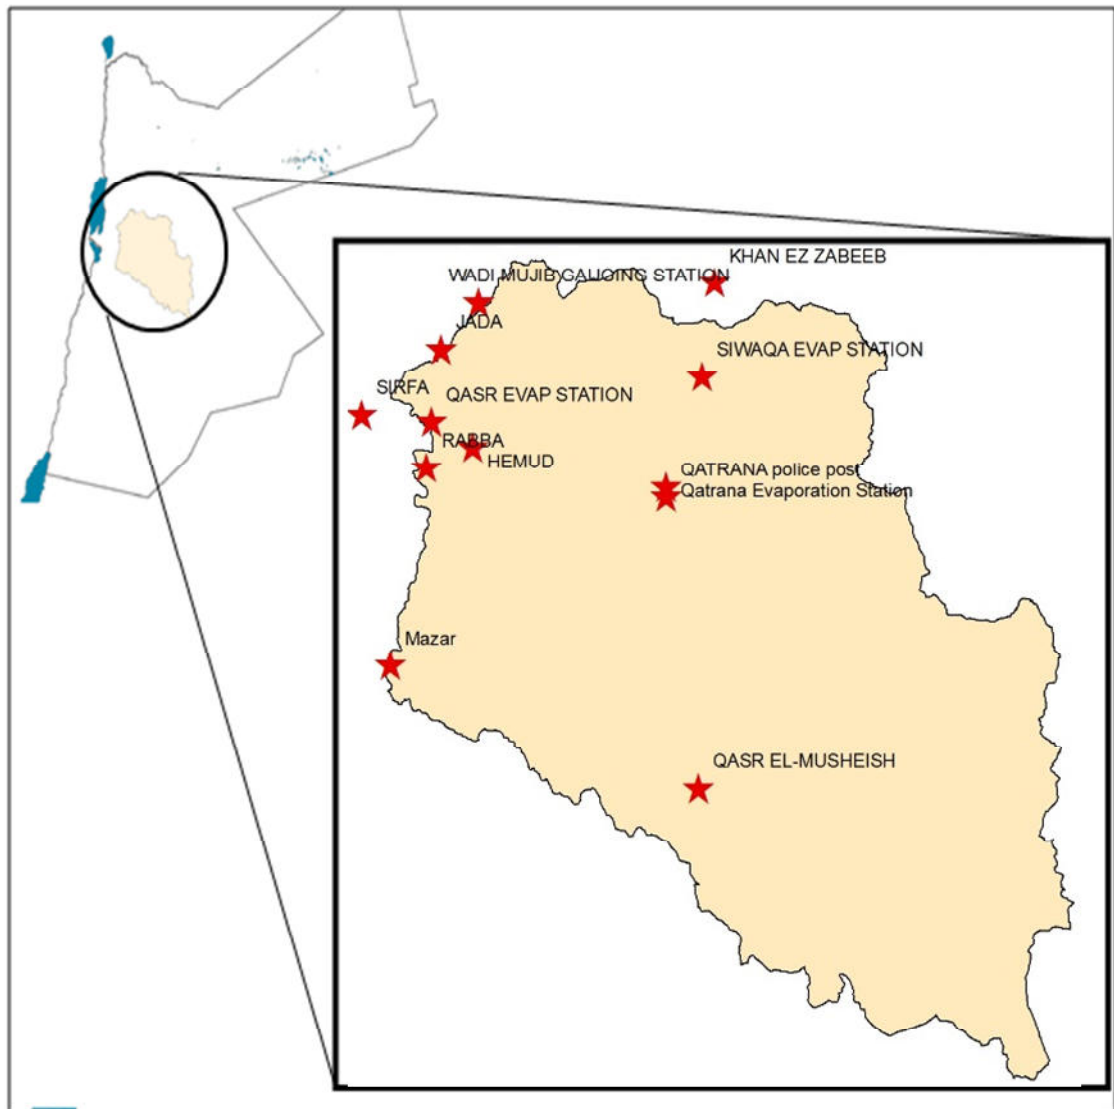


Figure 1: Wadi Mujib Location Map

2.3 Data Gathering

Data Gathering is the most important step in any hydrological study, all data concerning this work were compiled from different governmental organizations in Jordan; the primary sets of data include geographical coordinates, above the mean sea level elevation, geology, hydrology and hydrogeology.

First, GIS vector data/ digital database layers that cover the study area are required for delineating the watershed, such layers are contour lines with 10 m interval and topographic maps with a scale of (1:50,000) were obtained from the Royal Jordanian Geographic Centre (RJGC).

Historical records of the main climatic variables for existing meteorological stations were used to assess the current climate and future climate changes. These variables, which include, in particular, precipitation, evaporation and runoff, were compiled from the database of the Ministry of Water and Irrigation (MWI). All sites located in the selected catchment were chosen to represent the best possible coverage of the study area. The periods of the collected data vary among meteorological stations and limited to the last 40 years, but to be consistent, the selected time scale for analyzing the climate data was based on the common period between the station datasets, primarily due to the need to compare the datasets of stations without any temporal biases, such as in the determination of the magnitude of change, thus, the period of observations used in the study for all sites is (1990-2013).

Runoff gauging stations are usually located downstream the main river that flows into a reservoir; the gauging station was selected to represent the streamflow in the reach just before Mujib dam and discharge depths on a daily basis were collected over the period of study.

2.4 GIS Mapping: Processing of Map Theme Layers

Arc GIS 10.1 was utilized to delineate the watershed main parameters such as drainage area, length of a watershed and drainage slope. Follows are the steps that have been applied on the study area for the delineation process:

- Digital elevation Model (DEM) was extracted from Contour lines with 10 m interval, the contour maps was derived from field measurements and topographic maps with a scale of (1:50,000), Figure 2.
- Flow direction and Flow accumulation were derived from the DEM layer to determine the outlet within the basin; the outlets are located on the largest streams which acquire the highest stream order.

Catchment areas were extracted based on the flow direction and drainage network, the minor catchments extracted were merged together to determine the rough boundaries of the final catchment, and then the actual watershed boundaries were adjusted manually using the contour maps, Figure 3. The Drainage area of Mujib watershed found to be 4770km², Main stream Length is about 155.2km and the watershed slope is 7%.

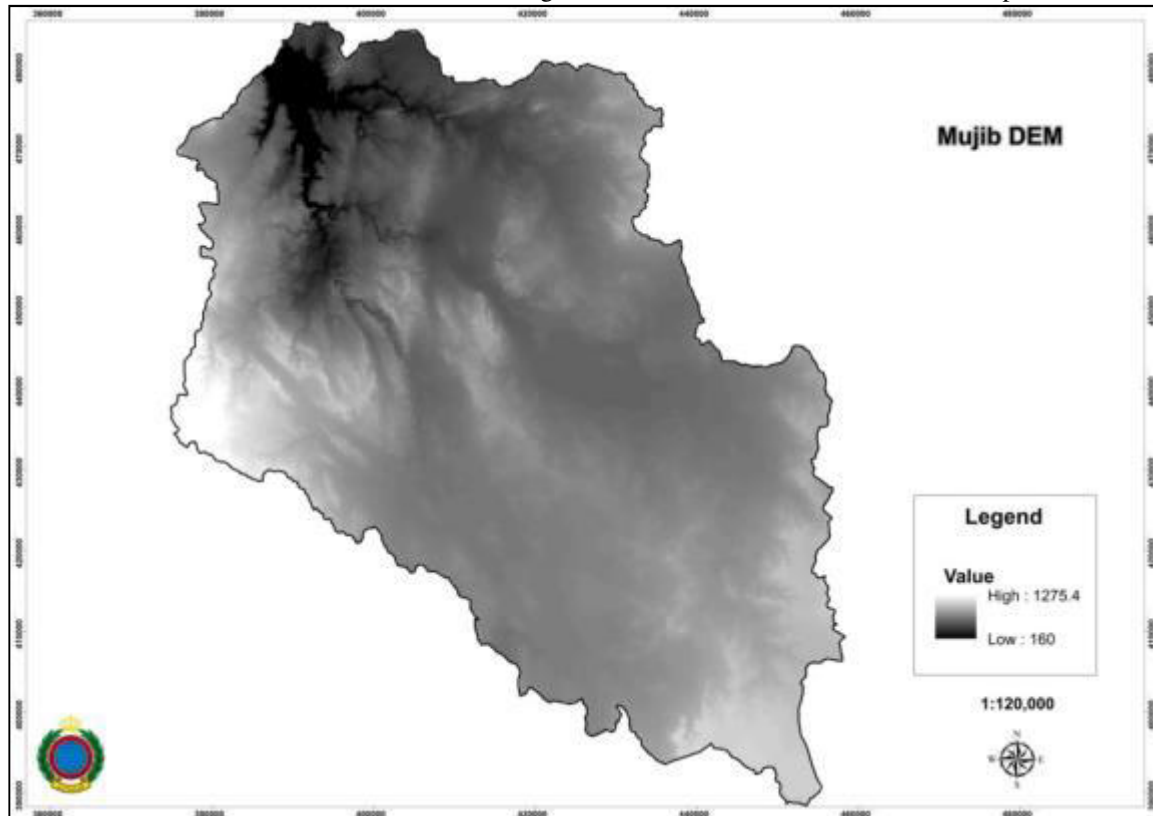


Figure 2: Digital Elevation Model (DEM) for Mujib Watershed

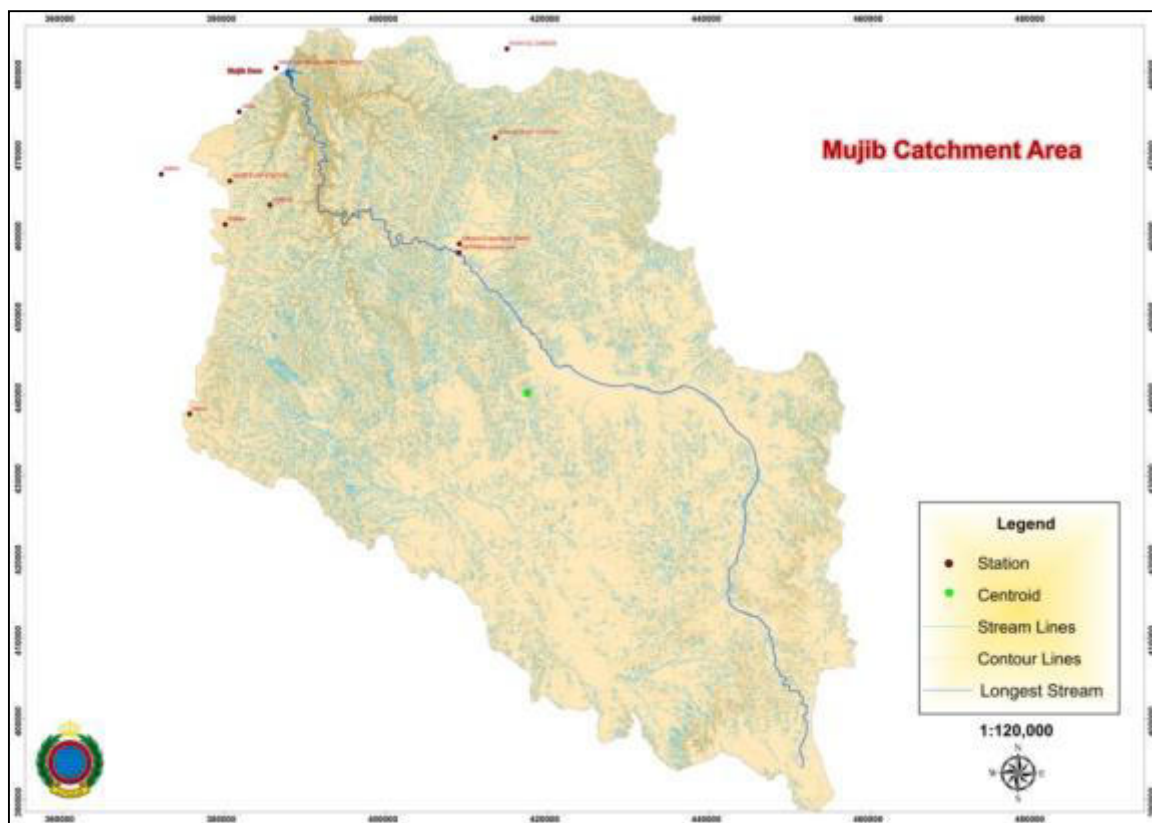


Figure 3: Mujib catchment area derived from DEM with the main parameters and gauging stations

3. Building and Running WEAP Model

In this study, WEAP model was investigated to figure out the current and the possible future change of runoff; therefore, the investigation consisted of predicting climate scenarios to assess different aspects of climate change on the availability of water resources. WEAP model has been used to simulate the surface runoff resulted from precipitation based on the current account year which is known as the “Base Scenario”. Then, different scenarios have been created and analyzed based on a variety of assumptions of hydrological trends known as a “Reference Scenarios”.

The current account was implemented to take the years from 1991 to 2013 as a base scenario. The current account year represents the basic definition of the water system as it currently exists, usually the first year of the base scenario, in this case, 1991 water year; that starts at the 1st of October 1990 and ends at 30th of September 1991, the current accounts are also assumed to be the starting year for all scenarios. The last year of scenarios is selected to be the 2050 water year. The time step in WEAP can be daily or monthly; here it is selected to be 365 days each year excluding leap days (i.e. February 29).

Figure 4 presents the WEAP platform for Mujib dam catchment; it shows the main hydrological elements of the water harvesting system and their linkage as drawn in the WEAP interface.

Data required for the modeling using Rainfall Runoff method were added for the catchment using the ReadFromFile function such as precipitation and evaporation on a daily basis for a representative one gauge station. Fractions of runoff, infiltration and evaporation were 4%, 7% and 89%, respectively (MWI, 2012). These fractions were added to the model and assumed to be constant in the current and reference scenarios.



Figure 4: Schematic of the WEAP model for Mujib Dam catchment

4. Results and Discussion

4.1 First Model Run

Runoff in the main streams has been simulated over the period between 1991 and 2050. The first attempt for the annual simulated runoff from the base scenario over the period from 1991 to 2013 and the predicted runoff simulation for the reference scenario over the period between 2014 and 2050 are displayed in Figure 5, it reveals that the simulated runoff cycle have obvious pattern.

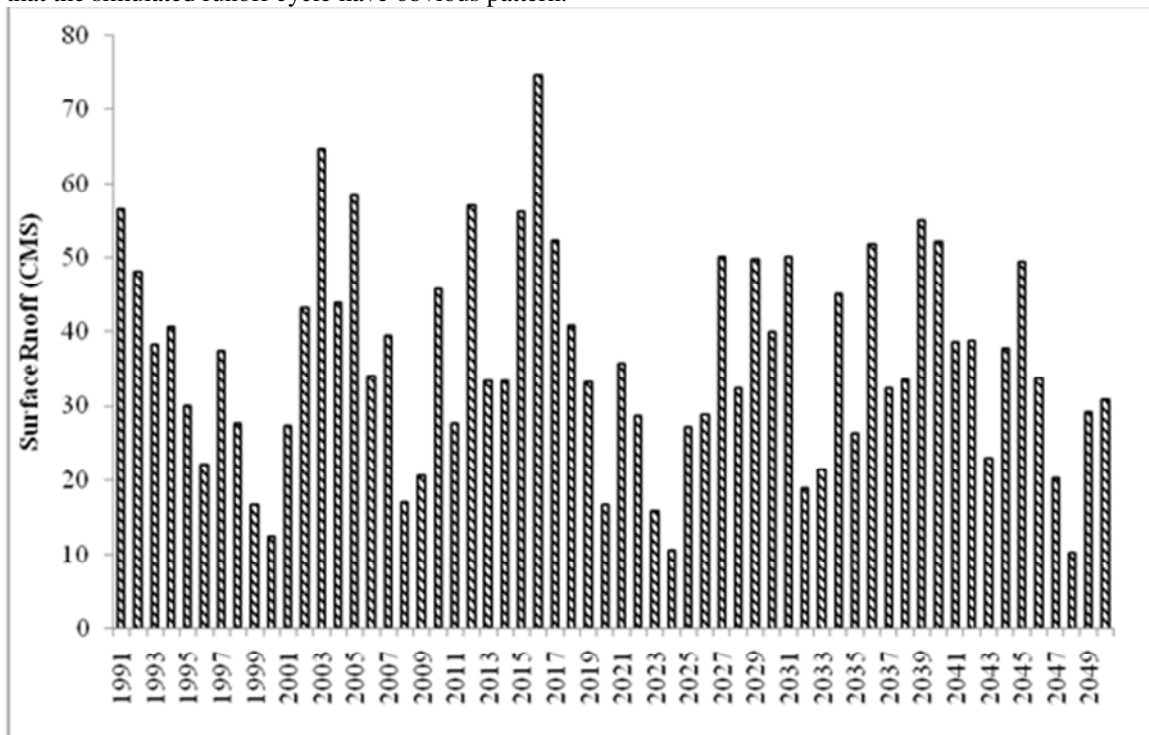


Figure 5: The Base Scenario Simulation Results over the period between 1991 and 2050

4.2 Model Calibration and Validation

Model calibration is an essential step before proceeding with future prediction, this is to ensure that the simulated runoff resulted from modeling process are matching those measured values in the current account. Model validation usually follows calibration; Root Mean Square (RMS) error was performed to evaluate the confidence in the model to represent the optimum fit of the model output to historical measurements of streamflow.

The smaller the RMS value, the better the performance of the model, for a perfect model, RMS must equals to 0. It has been calculated for the simulated runoff values using the following formula:

$$m_x = \sqrt{\frac{1}{n} \sum_{i=1}^n (\delta_{xi})^2}$$

Where;

mx: RMS

δ_{xi} : Deference between observed and simulated values

n: No. of Observations

The aim of calibrating the rainfall runoff model in WEAP was to have a good representation of the actual streamflow that could be help as a base for further climate change analysis rather than representing the exact conditions and runoff properties of the catchment.

The period between 1991 and 2013 of the streamflow data were used for calibration and validation of the model, Figure 6 displays a visual comparison between modeled and observed streamflow before calibration, the first attempt shows that, the simulated annual average streamflow was over-predicted; in other words, the model simulation of discharge was higher than the observed. However, the model shows year to year different performances.

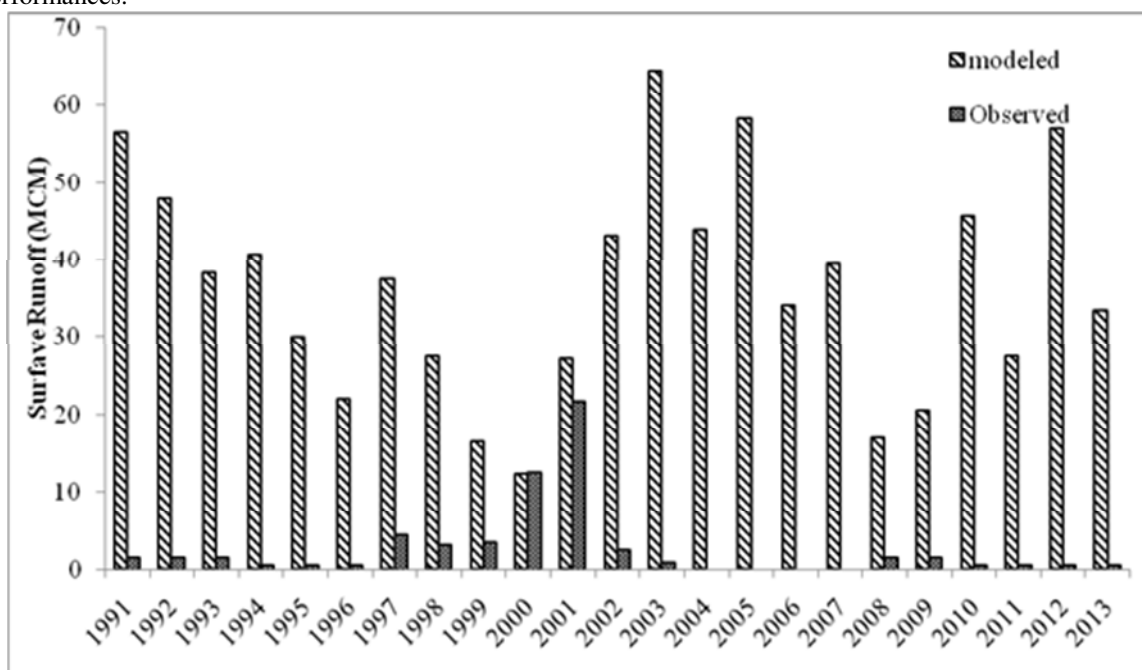


Figure 6: Simulated Surface Runoff (un-calibrated) versus Observed Streamflow Values for the Reference Scenario

Two main assumptions must be taken into account before calibration; the first is that, the basic characteristics of the catchment, such as the areas, land use and soil properties, will not change along the period of analysis to 2050, the second is that, changing in temperature and precipitation will enhance the evapotranspiration and thus affect the runoff simulation, but the catchment runoff characteristics will not be affected by these changes.

For calibrating the streamflow, modification of the input parameters was done manually via trial and error in order to select the optimum values that minimize the gap between modeled and observed streamflow. An obvious comparison between the calibrated simulated streamflow and the measured values is first made by visual check of the modeled versus observed runoff graph, before validating the values statistically. However, this enables only an assessment of the overall performance of the model.

Figure 7 shows a comparison between modeled and observed streamflow at Mujib main river after calibration. The model shows different performance at Mujib watershed, there was a large difference between simulated and observed streamflow even after final calibration has been done. See Figure 7, which shows a comparison between modeled (calibrated) and observed streamflow at Mujib Main river after calibration, it reveals that the annual average streamflow observed does not exceed 1 cms, although, Mujib basin is one of the large catchments in Jordan that drains about 32 MCM annually to Mujib Dam.

With regards to the model performance criterion, even after final calibration has been done, the simulated runoff was over-estimated in most of the years, mainly in 1992, 2003, 2004, 2005 and 2012; the extreme values were excluded when measuring the modeling performance.

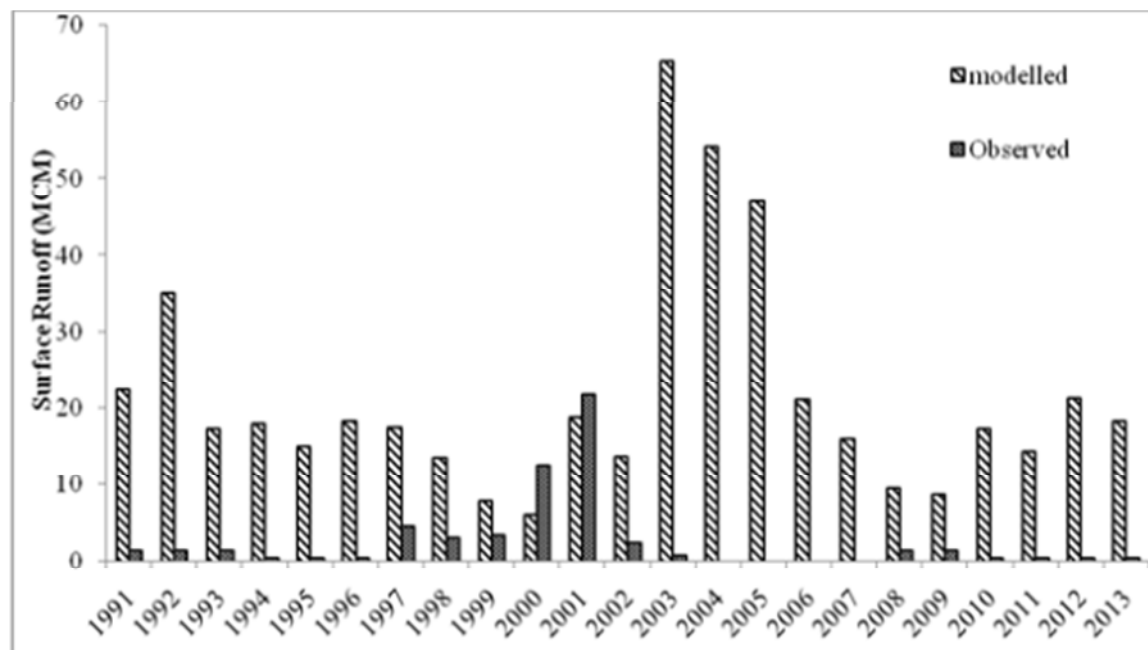


Figure 7: Simulated Surface Runoff (calibrated) versus Observed Streamflow Values for the Reference Scenario. The RMS calculated for the simulated runoff values are presented in Table 1. From the table, it was found that the RMS for the model used to simulate runoff values was 11.13. However, the measured data at the gauging station in this period were not reliable and may not represent the actual flow in Mujib main river, and because such data were obtained from the MWI, no clarification was made on their accuracy. In spite of these shortcomings, WEAP estimation of runoff is supposed to be correct, thus validation of such results is useless, since visual comparison is enough to judge that the correlation between simulated and observed runoff is very weak.

Table 1: Root Mean Square (RMS) calculation for the model results

	Simulated	Observed	O-S	(O-S) ²
1991	22.36423	1.45031	-20.9139	437.392
1993	17.33474	1.45031	-15.8844	252.315
1994	17.90107	0.452045	-17.449	304.4684
1995	15.04593	0.452045	-14.5939	212.9816
1996	18.28987	0.452045	-17.8378	318.188
1997	17.54308	4.480358	-13.0627	170.6346
1998	13.53547	3.086208	-10.4493	109.1871
1999	7.752581	3.38999	-4.36259	19.0322
2000	6.074127	12.57215	6.498024	42.22431
2001	18.83273	21.75431	2.921583	8.535649
2002	13.62277	2.441146	-11.1816	125.0287
2007	16.01281	0.015379	-15.9974	255.9177
2008	9.378217	1.45031	-7.92791	62.8517
2009	8.574202	1.45031	-7.12389	50.74983
2010	17.28485	0.452045	-16.8328	283.3434
2011	14.40184	0.452045	-13.9498	194.5969
			RMS	11.12664

4.3 Simulated Scenarios

Once the current account is created, a "reference" or "business-as-usual" scenario projection is established, based on a variety of economic, demographic, hydrological, and technological trends. The scenarios can address a broad range of "what if" questions, such as: What if climate change alters the hydrology? What would happen to the surface runoff if precipitation decreases and temperature increases? (WEAP User's Guide).

A set of hypothetical scenarios were implemented as a future scenario. In this context, a parameter of interest was added or subtracted by a defined quantity or percentage to assess the possible change due of climate change. The advantage of using such scenarios is its simplicity in presenting a wide range of adjustments for the

average annual changes in precipitation and temperature.

The reliable method in projecting future scenarios are those simulated from GCMs. Under the three GCMs scenarios that are applicable on Jordan climate, the worst case scenario predict a temperature change of +2°C (El-Fadel and Bou-Zeid, 2001). In general, each degree C of global temperature increase can be expected to increase the evapotranspiration by 7% and to change the precipitation by 5-10% across many regions including the Mediterrean countries (Allen et al., 1998).

Moreover, hypothetical increases in temperature of +2°C combined with no change and with a change of plus and minus 10% in precipitation have been applied to the baseline period 1991 to 2013 to develop climate change scenarios for further investigation. Combinations of changes of these two parameters results in four different scenarios as summarized in Table 2. These scenarios were built and used for further analysis the change in runoff for the period (2014-2050) and thus the water availability in the basin. The outcomes of the scenario were compared against the results of the base scenario and thus assessing their impact on the water system.

Table 1: Hypothetical climate change scenarios

Scenario	ΔT °C	ΔP %
base scenario	0	0
scenario 1	2	0
scenario 2	2	+10
scenario 3	2	-10

4.4 Climate Change Impacts on Surface Runoff

Surface runoff has been simulated based on the four climate in order to assess the impacts of climate change on runoff resulted from precipitation. This will help in quantifying the water availability within the catchment for the period from 2014 to 2050.

Runoff is directly affected by temperature and precipitation changes. It is expected that the simulation will result in four different changes in the amount of available water due to different prescribed climate change conditions used for each scenario. Figure 8 depicts the results obtained from WEAP simulation process for the projected change in runoff for Mujib Dam Catchment.

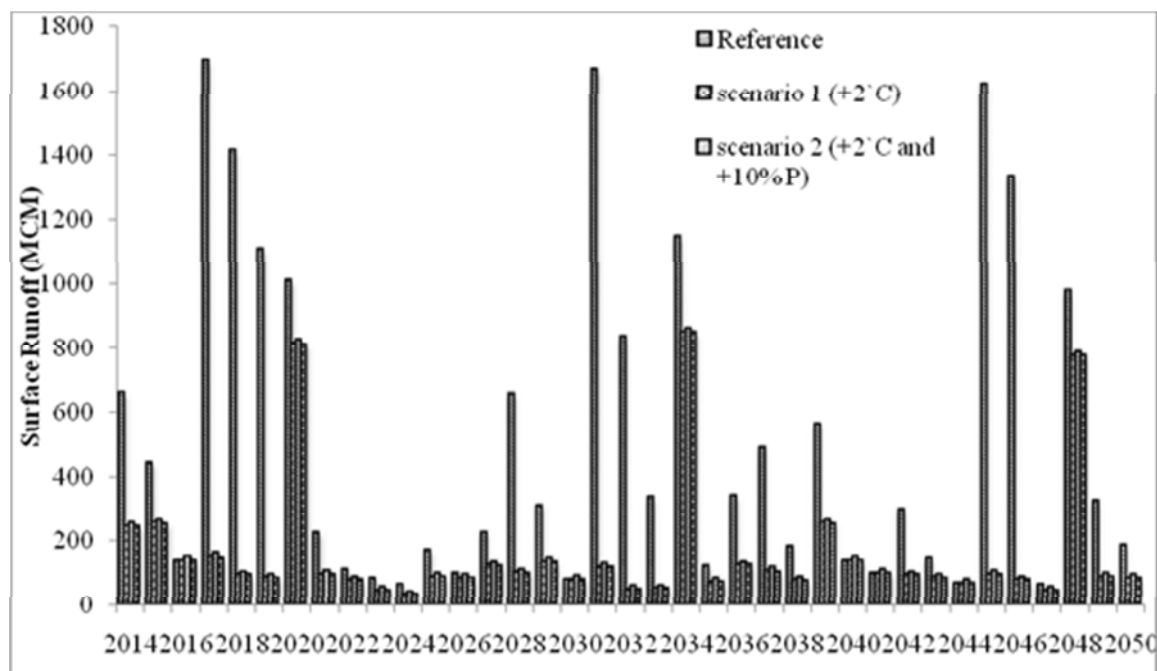


Figure 8: Projected Runoff Obtained from WEAP over the Period between 2014 and 2050 under Different Climate Change Scenarios

On an annual basis, the figure demonstrates that climate change will cause a significant decrease in runoff over the period from 2014 to 2050 under the three scenarios; it would be reduced by 70%. Year to year fluctuations are also projected. The graph shows that runoff, which represents the inflow to the dam, vary from year to year with some years are projected to face a minor or no change in annual average runoff while others are expected to be encountered by severe changes. This would cause a variation in the annual dam storage by year.

4.5 Climate Change Impacts on Monthly Distribution of Runoff

Climate change could have impacts on runoff distribution over months. Runoff under the three scenarios has been simulated on a monthly basis to figure out the possible changes in distribution. Different trends have been observed regarding the projected mean monthly runoff volumes; results of monthly runoff indicate future changes in the seasonal runoff distribution, it generally decreases in all months. Figure 9 illustrates the projected runoff on monthly basis over the period between 2014 and 2050 under different climate change scenarios. The figure reveals that the model expecting an extreme change in the flow under the three scenarios.

The magnitude of change differs from one month to another; there will be a slight decrease or no change on surface runoff amount for April month under both scenarios 1 and 3, while it is projected to increase by 32% for that month under scenario 2. The highest relative decrease in runoff in comparison with the reference scenario is expected to be in October to December months along with May. This decrease could be caused by: (1) an increase in rainfall intensity as a result of increasing air temperature and (2) a shift in rainfall distribution pattern from the autumn and spring months to the winter period.

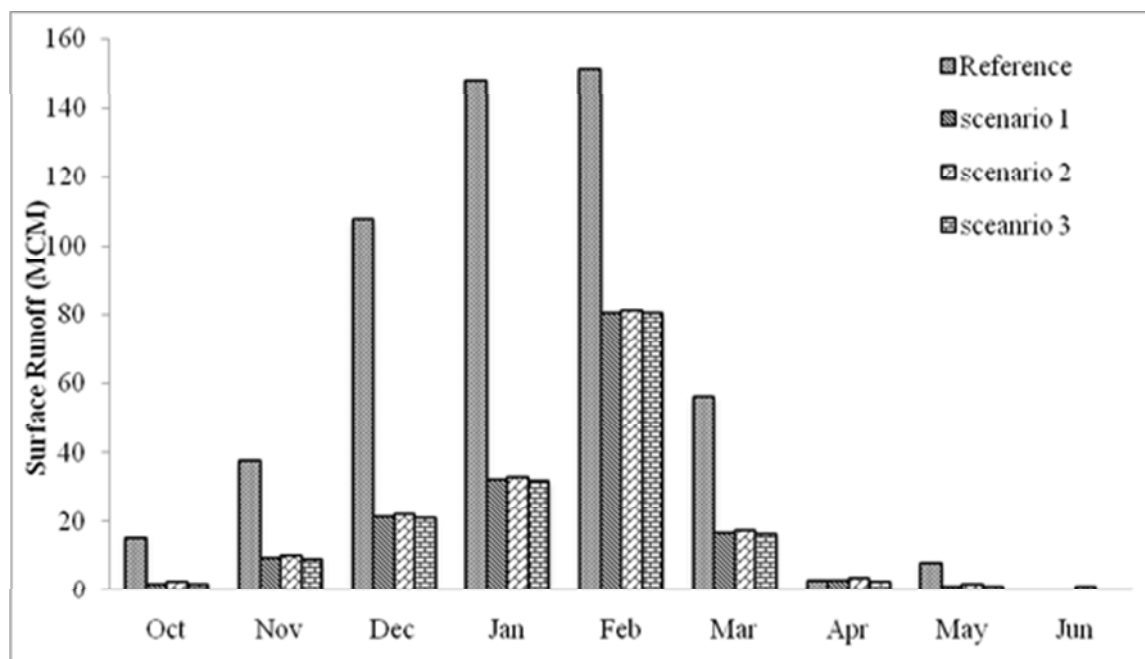


Figure 9: Projected Runoff over the Period (2014–2050) on Monthly Basis under Different Climate Change Scenarios

5. Conclusion

The results illustrate that the reservoir inflow changes during the simulated period were measured by changes in annual mean inflow into the dams. Impacts on inflow were measured by changes in climate variables; precipitation and temperature. The precipitation and evapotranspiration data for the period between 1991 and 2013 have been alerted for the model input to develop four different climate change scenarios. Generally speaking, the model was capable of investigating the possible future impacts of climate change on annual and monthly streamflow.

- Based on research results, the primary findings were as follows:
- Simulation results obtained from the four scenarios were compared to the reference scenario and it was found that the annual average runoff will be affected negatively by climate change.
- Climate change will cause a significant decrease in runoff over the period from 2014 to 2050 under the three scenarios; it would be reduced by 70% in comparison with the reference scenario.
- The reduction in annual runoff will influence the storage of the dams; as a result, this will add additional pressure on the available water resources in Jordan for later time horizon.
- The seasonal runoff pattern is greatly influenced by climate change, it could generally be concluded from the investigated scenarios, that the highest relative decrease in runoff will face October to December months along with May, while a slight decrease or no change would occur in April month.
- According to the anticipated changes in the annual and seasonal runoff, Mujib Basin is expected to be very vulnerable to drought due to climate change.

References

- MWI (Ministry of Water and Irrigation), (2012). *Annual Report*, MWI, Amman, Jordan.
- IPCC (2001), *Intergovernmental Panel on Climate Change*, Third Assessment Report.
- Hammouri N. (2009), Assessment of Climate Change Impacts of Water Resources in Jordan, *International Conference and Exhibition on Green Energy & Sustainability for Arid Regions & Mediterranean Countries*, Amman, Jordan.
- Intergovernmental Panel for Climate Change, Data Distribution Center (IPCC-DCC)* (1999). <http://ipcc-dcc.cru.uea.ac.uk>. (last visited in Sep. 29, 2014)
- Allen R., Pereira L., Raes D. and Smith M. (1998). Crop evapotranspiration. *FAO Irrigation and Drainage*, Paper 56, Rome, p. 30.
- Raskin P., Hansen E., Zhu Z. and Stavisky D. (1992), Simulation of water supply and demand in the Aral Sea region, *Journal of Water International*, Vol. 17, No. 2, pp. 55-67.
- Yates D., Sieber J., Purkey D. and Huber-Lee A. (2005), WEAP21 – A demand-, priority- and preference-driven water planning model – Part 1: Model characteristics, *Journal of Water International*, Vol. 30, No. 4, pp. 487-500.
- Talozzi S. (2010), Water and Security in Jordan, *Journal of Integrated Water Resources Management and Security in the Middle East*, 73–98.
- Hadadin N., Qaqish M., Akawwi E. and Bdour A. (2010). Water shortage in Jordan: sustainable solutions. *Journal of Desalination*, 250, 197–202.
- El-Fadel M. and Bou-Zeid E. (2001), Climate Change and Water Resources in the Middle East: Vulnerability, Socio-Economic Impacts, and Adaptation, *Journal of Natural Resources Planning and Management*.