

ENERGY USE EFFICIENCY OF MELON (*COLOCYNTHIS CITRULLUS*) PRODUCTION UNDER DIFFERENT TILLAGE METHODS

¹Ola, F.A., ¹Jekayinfa, S.O., ¹Akande, F.B.¹ and Sanusi, B.A.^{2*}

¹Department of Agricultural Engineering, Ladoke Akintola University of Technology, Ogbomosho
²Department of Agricultural and Bio-Environmental Engineering, The Oke-Ogun Polytechnic, Saki
E-mail: sanusibashiradisa@gmail.com

ABSTRACT

Since mechanization is inevitable and is associated with increase in productivity, there is need to find the most appropriate tillage method in crop production that minimizes energy consumption, enhance profitability and reduce environmental damage from fossil fuel related emission. This research investigates the energy use efficiency in melon production in three tillage methods (reduced, minimum and maximum). Human power, machinery, diesel fuel, fertilizers, seed and pesticides energy inputs were used during the cultivation of melon. Input and output energy analysis method was used to quantify the input and output energy in each of the tillage methods during the production of melon. The energy indices of melon production determined are; energy efficiency, energy productivity, specific energy, net energy and energy efficiency index. The total energy required per hectare in reduced, minimum and maximum tillage were 4528.29, 7191.07 and 8325.64 MJ/ha while the output energy were found to be 8112, 10404 and 10752 MJ/ha, respectively. The energy efficiency were estimated to be 1.79, 1.45 and 1.29 while net energy were found to be 3583.71, 3212.93 and 2426.36 MJ/ha for reduced, minimum and maximum tillage methods, respectively. The result revealed that maximum tillage is better than both reduced and minimum tillage in terms of energy efficiency and net energy gain.

Keywords: Energy, Melon, Tillage, Energy Efficiency, Net Energy

DOI: 10.7176/JETP/11-4-03

Publication date: August 31st 2021

1.1 Introduction

Production of food crops such as melon (*ColocynthisCitrullus*) is changing from small-scale or subsistence level into commercial crop production (mechanization) which involves intensive use of more energy on the farm in form of human power, machinery, diesel fuel and other agrochemicals (Babajide and Bamgboye, 2015). Increasing requirement of higher food production has led to intensive use of agricultural and natural resources (Khoshroo, 2014). Agriculture and energy are closely related since efficient use of energy is a key factor in sustainable agricultural production. Efficient energy use in agriculture is a pathway toward decreasing environmental hazards and improving agricultural sustainability (Izadikhah and Khoshroo, 2018). In the cultivation of arable crops, soil tillage is one of the greatest energy and labour consumer. Abdussalam (2008) reported that tillage practices require 75% of the total energy consumed during crop production. Therefore, the selection of an appropriate tillage method during crop production will drastically reduce the quantity of energy that goes into production of different crops. Since mechanization is inevitable and is associated with increase in productivity, there is need to find the most appropriate tillage method in crop production that minimizes energy consumption, enhance profitability and reduce environmental damage from fossil fuel related emission. To achieve this, the total energy input to the cropping process needstobe analyzed and estimated under different tillage methods (Nautiyal *et al.*, 2007; Manish, 2013). Therefore, this paper studies the energy use efficiency of melon production under different tillage methods.

2 Materials and Methods

2.1 Experimental Procedure

Field experiment was conducted at the seed unit of the Oyo State Agricultural Development Program (OSADEP), Saki West Local Government CouncilArea of the Oyo North Senatorial District, Oyo State, Nigeria, West Africa during raining season farming from April 2018 to July, 2020. Three different tillage methods were used: reduced (tillage with hoeing), minimum (ploughing with tractor twice) and maximum (ploughing twice and harrowing once) tillage. The experimental farm consists of three treatments, three replicates which were

arranged in a complete randomized block design and each tillage method representing a treatment. The experimental site consists of three blocks and each block consists of three plots making a total of 9 plots. The experimental farm was measured 46 m x 46 m while each block was measured 46 m x 10 m and each plot 10 m x 10 m with a space of 4 m in between the two adjacent plots which enabled the tractor to turn conveniently without entering manually tilled plots. Melon seeds of the 1306 variety were bought from a popular agro-vet shop at Ago-Are. The seeds were directly planted in the soil using foot dibbling method as described by Shafiqueet al. (2012) and Abdussalam (2015).

2.2 Energy Analysis

2.2.1 Energy analysis of land preparation in tillage methods

Land preparation in reduced tillage was carried out by using human power with the use of traditional implements such as hoes and cutlasses. For both minimum and maximum tillage, the initial land preparation was carried out with a three-bottom disc plough mounted on a New Holland (70866S) tractor makes for ploughing operations while harrowing operation was conducted using a disc harrow in maximum tillage. The operating time and the fuel consumed by the tractor per hectare during each operation was recorded and used to compute the energy input. The energy consumed during land preparation in reduced tillage and tractorized operations in both minimum and maximum tillage's were computed using equations 1 and 2 respectively as described by Bamgboye and Babajide (2015):

$$E_p = 3.6(0.075 NT\alpha) \quad 1$$

$$E_{tp} = 47.8 D + 3.6(0.075 NT\alpha) \quad 2$$

Where,

E_p = Human Energy consumed in land clearing in reduced tillage (MJ)

E_{tp} = Energy consumed for land clearing in both minimum and maximum tillage (MJ)

D = amount of diesel fuel consumed by operation (L)

$T\alpha$ = useful time spent by a male worker per unit operation (min)

N = number of workers involved in the operation.

2.2.3 Energy analysis of other farming operations

All other farming operations apart from land preparation such as planting, weeding, fertilizer application, crop protection, fruit gathering, depoding, seed extraction and seed washing in the production of melon in reduced, minimum and maximum tillage methods were carried out manually and the energy consumed in each of the operation was computed by using equation 3 as described by Bamgboye and Babajide (2015):

$$E_p = 3.6(0.075 NT\alpha) \quad 3$$

2.2.4 Physical energy inputs

The physical energy inputs from agrochemicals (pesticides and herbicides), fertilizer and seed energy inputs were computed by multiplying the respective energy equivalents with the quantity of the physical inputs using the expressions as described in equations 4, 5 and 6 by Haydar and Mustafa (2012).

$$\text{Chemical Energy input } \left(\frac{MJ}{ha}\right) = \frac{\text{Quantity (liter)} \times \text{Energy equivalent}}{\text{Applied area}} \quad 4$$

$$\text{Fertilizer energy input} = \frac{\text{Fertilizer } \left(\frac{kg}{ha}\right) \times \% NPK}{100} \quad 5$$

$$\text{Seed energy } \left(\frac{MJ}{ha}\right) = \frac{\text{seed } \left(\frac{kg}{ha}\right) \times \text{Energy equivalent}}{\text{Cultivated area}} \quad 6$$

The energy equivalents of different energy inputs and the reference authors from literature used in the computation of the analysis of energy use efficiency for melon production under the different tillage methods are as presented in Table 1.

Table 1: Energy Equivalents of Inputs and Outputs in Agricultural Production

Input	Unit	Energy Equivalent (MJ/kg)	Reference
Human power	h	1.97	Mikkola and Ahokas (2010)
Machinery	Kg	69.83	Mani <i>et al.</i> , 2007
Diesel fuel	L	56.3	Mortezaet al., 2012
Seed	Kg	1.2	Mortezaet al. (2012)
Chemical Fertilizer:			
Nitrogen	Kg	47.10	Mortezaet al. (2012)
Phosphorus	Kg	15.80	Mortezaet al. (2012)
Potassium	Kg	9.28	Mortezaet al. (2012)
Pesticides:			
Herbicides	Kg	238	Erdalet al., 2007
Fungicides	kg	216	Erdalet al., 2007
Insecticides	kg	101.2	Erdalet al., 2007

2.3 Energy indices

The energy indices in terms of energy use efficiency, energy productivity, specific energy, net energy and percentage energy index during the production of melon production were computed using equations 7, 8, 9, 10 and 11 as described by Asmat (2009);

$$\text{Energy efficiency} = \frac{\text{Energy output (MJha}^{-1}\text{)}}{\text{Energy input (MJha}^{-1}\text{)}} \quad 7$$

$$\text{Energy Productivity} = \frac{\text{Crop Yield (kg ha}^{-1}\text{)}}{\text{Total Energy input (MJha}^{-1}\text{)}} \quad 8$$

$$\text{Specific Energy} = \frac{\text{Energy input (MJha}^{-1}\text{)}}{\text{Melon yield (MJha}^{-1}\text{)}} \quad 9$$

$$\text{Net Energy} = \text{Energy output} - \text{Energy input} \quad 10$$

$$\text{Percentage Energy Index} = \frac{E_o - E_i}{E_o} \times 100 \quad 11$$

3 Results and Discussions

3.1 Input and Output Energy in the Production of Melon in Tillage Methods

The average energy input of melon production in three different tillage methods is presented in Table 2. It was observed from Table 2 that reduced tillage had the highest human energy input of 882 MJ/ha, maximum tillage had a value of 693.84 MJ/ha while the least human energy input of 637 MJ/ha was expended in minimum tillage. This result was expected because all farming operations in reduced tillage were done using human power. The highest machinery input of 1110.29 MJ/ha was expended in maximum tillage, followed by minimum tillage with value of 877.06 MJ/ha while the least machinery input of 502.78 MJ/ha was recorded in reduced tillage. Similarly, maximum tillage had the highest diesel fuel energy input of 3378 MJ/ha, minimum tillage accounted for 2533.5 MJ/ha while no diesel fuel was consumed in reduced tillage treatment. The same quantity of fertilizers (1479.69 MJ/ha), seed (18.7 MJ/ha) and pesticides (1645.12 MJ/ha) were expended in the three tillage methods considered and energy inputs were used to avoid unbiased treatment. On the overall, maximum tillage had the highest energy input of 8325.64 MJ/ha, followed by minimum tillage with a total energy input of 7191.07 MJ/ha while the least energy input of 4528.29 MJ/ha was recorded in reduced tillage. Morteza *et al.* (2012) reported the energy input values of 403.24 and 4.54 kg ha⁻¹ for total fertilizers and biocides used in the production of corn grain with total energy input of 39232.79 MJha⁻¹ for various processes. The harvested yield of melon in the three tillage methods considered were also presented in Table 2 and it was observed that maximum tillage had the highest yield of 8960 kg/ha, followed by minimum tillage with a value of 8670 kg/ha while the least yield of 6760 kg/ha was recorded in reduced tillage. The highest energy output of 10752 MJ/ha in maximum tillage, followed by minimum tillage with a value of 10404 MJ/ha while the least energy output of 8112 MJ/ha was estimated in reduced tillage. The anthropogenic energy input ratio in the production of melon is presented in Figure 1.

Table 2: Input and Output Energy in the Production of Melon in Tillage Methods

S/N	Energy input	Quantity used in Tillage Methods (ha)			Energy equivalent (MJ/ha)	Total Energy Equivalent (MJ/ha)		
		Reduced	Minimum	Maximum		Reduced	Minimum	Maximum
1	Human power (h)	450	325	354	1.96	882	637	693.84
2	Machinery (kg)	7.2	12.56	15.9	69.83	502.78	877.06	1110.29
3	Diesel Fuel (l)	00	45	60	56.3	00	2533.5	3378
4	Fertilizer (kg)	20.50	20.50	20.50	72.18	1479.69	1479.69	1479.69
5	Seed (kg)	8.5	8.5	8.5	1.2	18.7	18.7	18.7
6	Pesticide (l)	4.85	4.85	4.85	339.20	1645.12	1645.12	1645.12
7	Total Energy input (MJ/ha)					4528.29	7191.07	8325.64
8	Yield (kg ha^{-1})					6760	8670	8960
9	Total Energy Output (MJ/ha)					8112	10404	10752

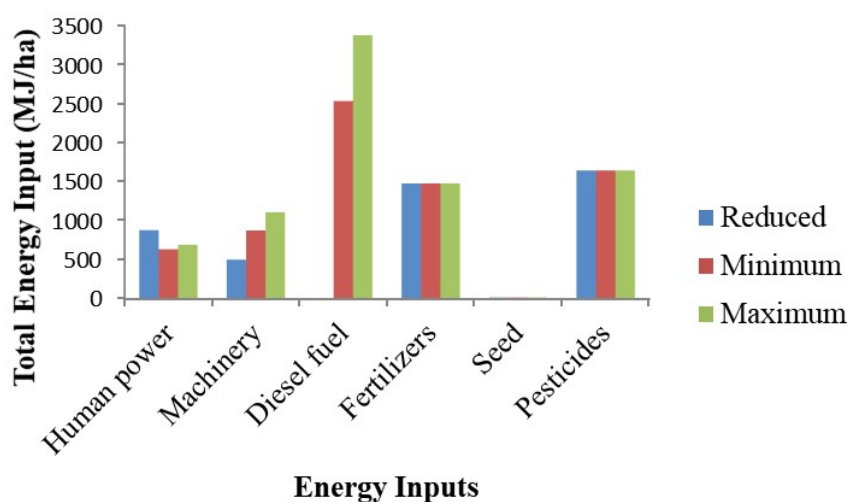


Figure 1: Anthropogenic Energy Input Ratio of Melon Production

3.2 Energy Indices of Melon Production in Tillage Methods

The calculated energy indices in the production of melon in three tillage methods were presented in Table 3. It was observed from the table that the highest energy use efficiency of 1.75 was obtained in reduced tillage, minimum tillage had a value of 1.45 and the least use efficiency of 1.29 was recorded in maximum tillage. The highest energy productivity of 1.49 MJ/kg was recorded in reduced tillage, followed by minimum tillage with a value of 1.20 MJ/kg while the least energy productivity of 1.08 MJ/kg was noticed in maximum tillage. Similarly, maximum tillage had the highest specific energy of 0.93 MJ/ha, followed by minimum tillage with a value 0.83 MJ/ha and the least specific energy value of 0.67 MJ/ha was calculated in reduced tillage. The highest net energy value of 3583.71 was estimated in reduced tillage, followed by minimum tillage with net energy value of 3212.93 MJ/ha while the least net energy value of 2426.36 MJ/ha was estimated in maximum tillage. The highest energy efficiency index of 0.44 was calculated for reduced tillage, minimum tillage had a value of 0.31 while the least energy efficiency index of 0.23 was calculated for maximum tillage.

Table 3: Energy Indices in the Production of Melon in Tillage Methods (Results)

S/N	Energy Indices	Tillage Methods		
		Reduced	Minimum	Maximum
1	Total Energy Input (MJ/ha)	4528.29	7191.07	8325.64
2	Yield (kg/ha ⁻¹)	6760	8670	8960
3	Total Energy output (MJ/ha)	8112	10404	10752
4	Energy Efficiency	1.79	1.45	1.29
5	Energy Productivity(MJkg ⁻¹)	1.49	1.20	1.08
6	Specific Energy(MJha ⁻¹)	0.67	0.83	0.93
7	Net Energy MJha ⁻¹)	3583.71	3212.93	2426.36
8	Energy Efficiency Index (%)	0.44	0.31	0.23

3.3 Percentage Composition of Energy Input

The percentage composition of energy input from human power, machinery, diesel fuel, fertilizers, seed and pesticides is depicted in Figure 2. It was observed from Figure 2(a) that in reduced tillage, pesticides had the highest percentage value of 36.33% of the total energy input,

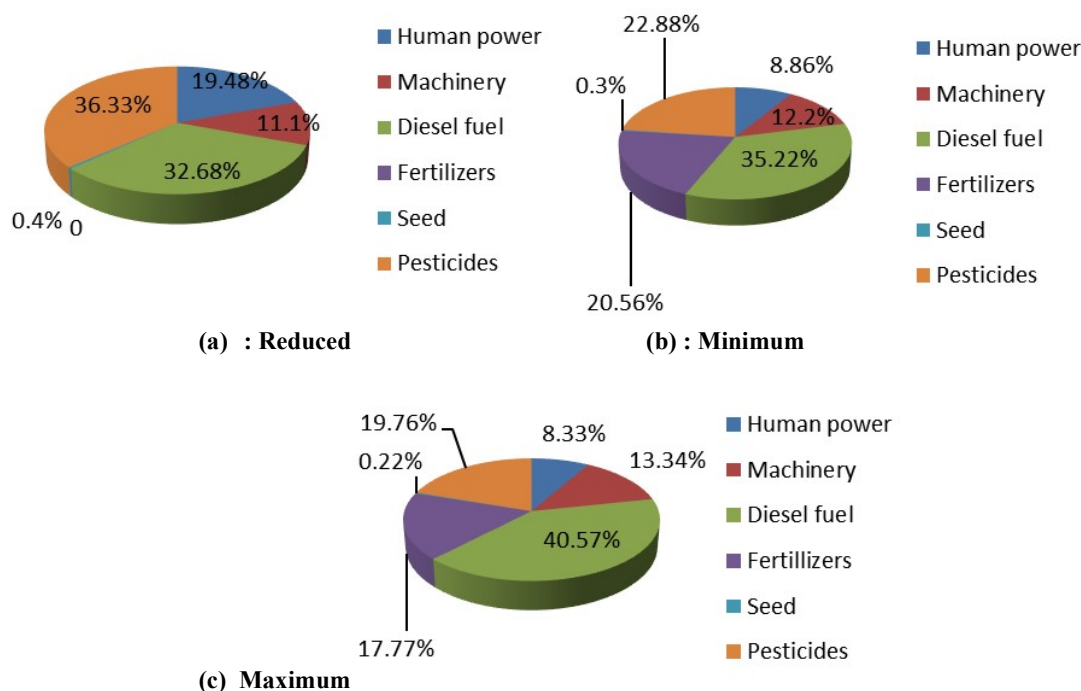


Figure 2: Percentage Composition of Energy Inputs in Tillage Methods; (a) Reduced, (b) Minimum and (c) Maximum Tillages

fertilizer, human power; machinery had the values of 32.68, 19.48 and 11.10%, respectively, while the least percentage energy input of 0.4% was recorded in seed energy input. Similarly, Figure 2(b) shows that in minimum tillage, diesel fuel had the highest energy input of 35.22%, pesticides, fertilizers, machinery and human power recorded the percentage values of 22.88, 20.55, 12.20 and 8.86%, respectively, while the least energy input of 0.3% was observed in seed energy input. Figure 2(c) also shows the percentage composition of energy input in maximum tillage and it was observed that the highest percentage energy input of 40.57% was recorded in diesel fuel, pesticides, fertilizers, machinery and human power recorded the percentage values of 19.76, 17.77, 13.34 and 8.33%, respectively, while seed energy input had the least percentage value of 0.22%. Oladimeji *et al.* (2016) report a total energy input of 4329.7 MJ/ha for semi mechanized farm and 2687 MJ/ha for traditional farm. Total Energy Equivalent (TEE) of 45.5 MJ of labour, 451.4 MJ of machinery, 600 MJ of herbicide, 255 MJ of FYM, 661.4 MJ of nitrogen, 119.3 MJ of phosphate, 67 MJ of potassium, 1221.7 MJ of diesel and 908.4 MJ of seedling materials were reported for semi mechanized farm while Total Energy Equivalent (TEE) of 97.8 MJ of labour, 216 MJ of herbicide, 753.3 MJ of FYM, and equal amount of nitrogen, phosphate and potassium were used in traditional farms.

Conclusions

In this study, the energy use efficiency of melon production under different tillage methods has been investigated and the following results were obtained:

1. Maximum tillage consumed the highest energy input with a total of 8325.64 MJ/ha, followed by minimum tillage with a value of 7191.07 MJ/ha while reduced tillage had the least total energy value of 4528.29 MJ/ha.
2. Diesel fuel is the major energy input in both minimum (35.22%) and maximum (40.57%) tillage while pesticide (36.33%) is the most energy input in reduced tillage.

References

- Abdussalam, O.Y. (2015). Modelling of Energy Requirement Demand for Tillage Operations in Maize Production. An Unpublished ph.D Thesis submitted to the Department of Agricultural Engineering Ahmadu Bello University, Zaria, Nigeria.
- Bamgboye, A.I. and S.K. Babajide, (2015). Energy Input in the Production of Cassava. *Journal of Energy and Environmental Research*, 5 (1): 42-48. DOI:10.5539/eer.v5n1p42
- Erdal, H., K. Esengun and G. Erdal (2009). The Functional Relationship between Energy Inputs and Fruit Yield: A Case Study of Stake Tomato in Turkey. *Journal of Sustainable Agriculture*, 33: 835-847.
- Khoshroo, A. (2014). Energy use Pattern and Greenhouse Gas Emission of Wheat Production: A Case Study in Iran. *Agricultural Communications*, 2: 9-14.
- Khoshroo, A. and M. Izadikhah (2018). Improving Efficiency of Farming Products through Benchmarking and Data Envelopment Analysis. *Int. J. Manag. Decis. Making* (in press).
- Mani, I., P. Kumar., J. S. Panwar. and K. Kant (2007). Variation in Energy Consumption in Production of Wheat-Maize with Varying Altitudes in Hilly Regions of Himachal Pradesh. *India Energy*, 32: 2336-2339.
- Mikkola, J. H. and J. Ahokas (2010). Indirect Energy Input of Agricultural Machinery in Bio-Energy Production. *Renewable Energy*, 35: 23-8.
- Morteza, T., G. M. Hassan, and M. Y. Nasim (2012). Energy Input–Output Modeling and Economical Analyze for Corn Grain Production in Iran. *Journal of Elixir Agriculture*, 52:11500-11505
- Nautiyal, S, H., K. S. Kaechele., R. K. Rao and K. G. Saxena (2007). Energy and Economic Analysis of Traditional Versus Introduced Crops Cultivation in the Mountains of the Indian Himalayas. *Agro-Ecosystems*, 4:355-366.
- Oladimeji., Y. U., Abdulsalam, Z., Lawal, A. F, Suleiman, R. and Olarewaju, T. O. (2016)energy use and economic analysis of melon (*colocynthis citrullus* l.) production technologies in kwara state Nigeria. *Nigerian Journal of Agriculture, Food and Environment*. 12(3):162-168
- Shafique, Q. M., S. M. Muhammad., Q M. Abdul and A. Nadeem (2012). Evaluation of Inputs and Outputs Energy for Maize Grain Yield. *Sarhad Journal of Agriculture*, 28(3): 223-226